

ARMY RESEARCH LABORATORY



Burn-Rate Investigations of HAN-Based Candidate Liquid Propellants

by W. F. McBratney and J. A. Vanderhoff

ARL-TR-1927

March 1999

19990426 001

Approved for public release; distribution is unlimited.

DTIC QUALITY INSPECTED 2

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade **names** does not constitute an official **endorsement** or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 210055066

ARL-IX-1927

March 1999

Burn-Rate Investigations of HAN-Based Candidate Liquid Propellants

W. F. McBratney and J. A. Vanderhoff

Weapons and Materials Research Directorate, ARL

Abstract

High-pressure windowed strand burners have been used to obtain burning rates for some hydroxyl ammonium nitrate (HAN) liquid propellants over the pressure range from about 10 to 300 **MPa**. Measured linear burn rates for these liquids were erratic due to the manifestation of surface irregularities. This burning surface variable has been minimized by gelling. A pressure break occurs around 80 **MPa** for these gelled propellants. The burn rate (r) vs. pressure (p) can be adequately expressed by an exponential of the form $r = Ap^n$. For pressures below 70 **MPa**, $n \sim 0.2$, and for pressures between 70 and 300 **MPa**, $n \sim 1.1$. One HAN-based liquid propellant, XM46, has been investigated as a function of temperature as well. Due to the substantial increase in viscosity, cold-temperature ($\sim -50^\circ\text{C}$) burn rates were obtained without the use of any gelling agent. These cold temperature burn rates are slightly lower than the ambient temperature rates and follow a similar pressure behavior at pressures above about 30 **MPa**. Hot-temperature ($\sim +60^\circ\text{C}$) gelled XM46 burn rates are slightly larger than the ambient-temperature rates, again with a similar pressure behavior. Burn rates were also determined for gelled 9.1 M HAN through the 70-**MPa** pressure region, but no convincing evidence of a similar pressure break was observed.

Acknowledgments

The authors express their appreciation for the funding support of Ms. Gloria **P.** Wren of the Advanced Propulsion Technology Branch, U.S. Army Research Laboratory (**ARL**) and Mr. Henry **Kerwien**, Project Manager (PM) for the Office of the Project Manager (**OPM**)-**Crusader**.

INTENTIONALLY **LEFT** BLANK.

Table of Contents

	<u>Page</u>
Acknowledgments	iii
List of Figures	vii
List of Tables	ix
1. Introduction	1
2. Experimental	1
2.1 Ambient Temperature	1
2.2 Ignition	3
2.3 Gelling Agents	3
2.4 Cold and Hot Temperature	3
3. Results	5
4. Discussion	11
5. Summary	15
6. References	17
Distribution List	19
Report Documentation Page*	21

INTENTIONALLY LEFT BLANK.

List of Figures

<u>Figure</u>	Page
1. Sketch of High-Pressure Windowed Chamber Experiment.	2
2. Sample Cell Assembly Used for Obtaining Hot and Cold Burn-Rate Measurements for XM46	4
3. Windowed Strand Burner-Burn Rate Data for XM46 and LGP1845 as a Function of Pressure at Ambient-Temperature Conditions	6
4. Bum-RateDataComparisonBetween9.1 M HAN and XM46	8
5. Bum-Rate Data Comparison Between LP1898 and XM46	8
6. Comparison of the Bum Rates for Gelled XM46 at Ambient Temperature (25 ° C) and Ungelled XM46 at Cold Temperature (-50° C)	9
7. Temperature History of the Sample Cell Assembly for a Cold-Temperature Experiment	10
8. Comparison of the Burn-Rate Behavior Between Gelled XM46 at Ambient and +60° C	11

INTENTIONALLY **LEFT** BLANK.

List of Tables

<u>Table</u>		<u>Page</u>
1.	Propellant Mixtures	5
2.	Fitted Values for the Burn Rates of Various Propellant Samples When Using the Exponential Form $r = Ap^n$, Where r Is in Centimeters Per Second and p Is in Megapascals	7
3.	Some Thermophysical Quantities for XM46 at +25° C and 70 MPa.....	13

INTENTIONALLY LEFT BLANK.

1. Introduction

The burning-rate behavior of a propellant vs. pressure is critical information for characterizing (modeling) the interior ballistics of a gun. Large-pressure exponents for burning rate can lead [1] to pressure oscillations. Moreover, pressure oscillations are of interest since they occur in most artillery systems employing a liquid propellant. Oberle and Wren [2] determined burn rates for XM46 as a function of pressure from a closed-bomb experiment. One of their desires was to obtain burn rates without gelling the liquid propellant. Their results indicated a rather large pressure exponent (2.0) for pressures from 100 to 190 MPa. Analysis of this closed-bomb data assumed that only the top face of the liquid propellant was exposed for combustion. The liquid propellant thus regressed in a planar cigarette fashion, where the surface area was assumed to remain constant.

Previously, McBratney, Bensinger, and Arford [3] noted substantial surface disturbances on liquid monopropellants for various ignition stimuli and attempted to minimize these irregularities by gelling. Egorshv, Kondrikov, and Yakovleva [4] have also used a gelling technique to study the burn-rate behavior of a variety of water-impregnated explosive compounds. The aim of the present work was to determine the pressure dependence of the burn rate of hydroxyl ammonium nitrate (HAN)-based liquid propellants by photographic observation of the regressing interface. For ambient- and hot-temperature ungelled cases, surface irregularities were seen for all pressures studied. Gelling the HAN-based liquid propellants reduced surface irregularities to a point where an essentially planar burn was established for pressures in the range from about 80 to 300 MPa. For pressures below this range, the regressing gelled surface established a pointed surface, as previously observed [5–7]. Cold-temperature burn rates for XM46 have been obtained without the need for gelling.

2. Experimental

2.1 Ambient Temperature. Windowed steel chambers capable of pressures up to about 150 and 300 MPa have been used to house liquid-propellant samples for photographic studies of their burning characteristics. An illustration of the 300-MPa maximum-pressure windowed chamber

experiment is shown in Figure 1. The internal diameter(D) of the chamber is 19 cm, and the internal volume can be varied from 1 to 12 l. The liquid-propellant samples were typically contained in rectangular acrylic cells with cross-sectional dimensions of 0.3 x 1.0 cm and lengths of about 4 cm. Backlighting of the sample cells was accomplished with a 300-W quartz-tungsten halogen lamp. Here, the light enters the chamber through a sapphire window of 1.27-cm clear aperture and is subsequently turned 90° by the 45° cut on an acrylic block. Photographic records of the burning behavior were recorded through a 1.27-cm x 5.0-cm rectangular clear-aperture sapphire observation window by either a half-frame 16-mm camera operating at approximately 1,000 frames/second or a 200-frame/second VHS movie camera. Regression rates were determined over a 2-cm length in the middle portion of the sample cell. This 2-cm distance was denoted by scribe marks on the cell face, and these were readily observable in the photographic records. Additionally, a known length metal needle was also placed on the cell to check for possible acrylic cell dimensional changes with pressure.


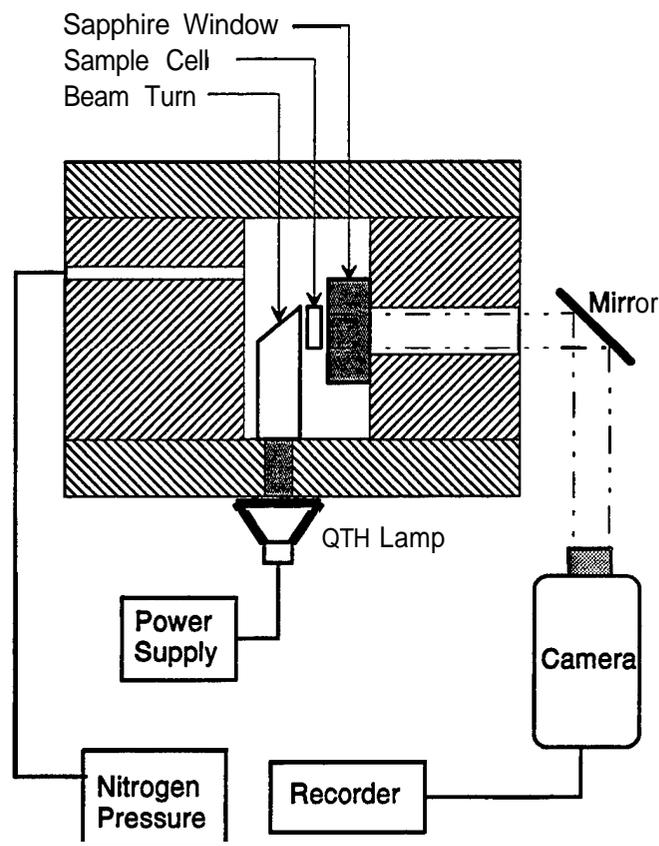


Figure 1. Sketch of High-Pressure Windowed Chamber Experiment.

2.2 Ignition. Ignition of the liquid propellant was accomplished by electrically heating a 0.1-mm-diameter nichrome wire. A number of variations of this technique were tested to see if surface disturbances could be minimized or eliminated. The bare ignition wire placed in the liquid propellant near the top surface created large surface disturbances that were present for the duration of the burn. Another variation involved coating the ignition wire with a solid mixture consisting of primarily nitrocellulose and black powder. Placement of this coated ignition wire several millimeters above the surface of the liquid propellant created a condition where the liquid propellant would be ignited by the hot combustion gases coming off the coated ignition wire. Surface effects were still seen for this case, and it also turned out to be an unreliable method of ignition. The variation that has been used for the data obtained in this report involved encasing the ignition wire with gelled **XM46** and placing the same on top of the liquid **XM46** contained in the sample cell. This method proved to be reliable, although varying surface disturbances were still produced and were of a sufficient magnitude to be easily observed when the ungelled liquid propellant was burned.

2.3 Gelling Agents. Several gelling agents have been tested, and those results have been discussed previously [7]. In summary, early data have been obtained by gelling with 2% Kelzan gel, and the more recent results have been obtained by gelling with 1–1.5% Rhamsam gum. Both of these gelling agents are fermentation polysaccharides and obtained from the **Kelco** Company.

2.4 Cold and Hot Temperature. In order to make burn-rate measurements of **XM46** at cold (about -50°C) and hot (about 50°C) conditions, the present experiment needed modification. It was decided not to heat or cool the whole windowed pressure chamber because that would affect the ultimate pressure limits. Since the typical volume of propellant sample that is used per experiment is small (1.25 cm^3), hot or cold temperatures could not be maintained without the aid of heaters/coolers or a thermal mass in intimate contact with the sample. Cylindrical acrylic blocks, 4.5 cm long and 7.6 cm in diameter, were incorporated as thermal masses, and the sample cell assembly is shown in Figure 2. The internal cross section of the center of the sample cell is 0.31 cm x 1.0 cm. The upper part of the sample cell contains a throat with an initial cross section of 0.31 cm x 0.30 cm. Post-analyses of the sample cells show that this throat area has opened up to a cross section of about 0.4 cm x 0.4 cm. The increase in throat size is due to ablation of the acrylic

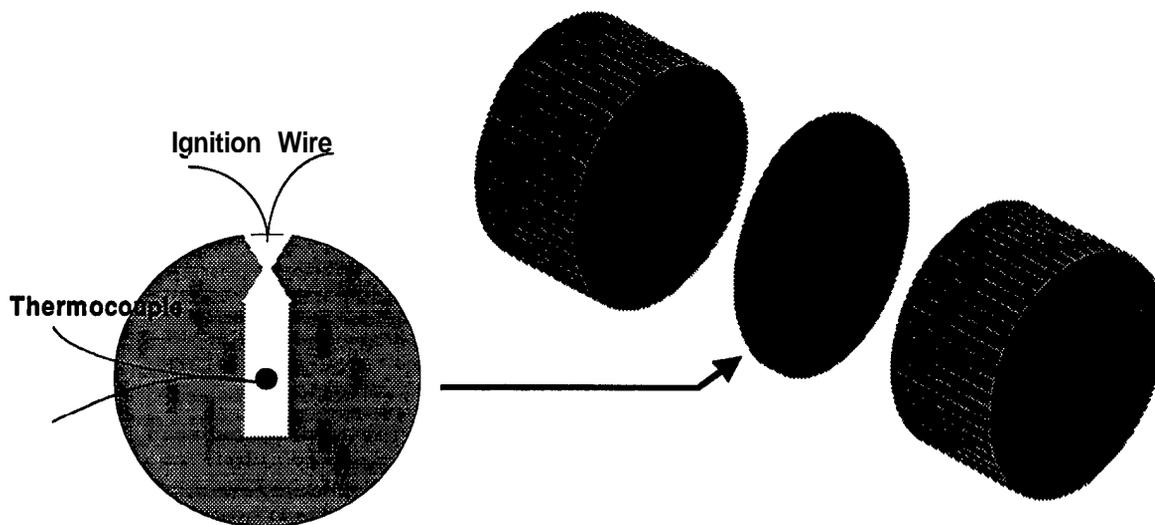

Cross section of **XM46** sample cell. Consists of a sandwich of three acrylic disks. Center disk cut to form the sample volume.

Figure 2. Sample Cell Assembly Used for Obtaining Hot and Cold Burn-Rate Measurements for XM46. The Cutout Section That Forms the Cell Is Shown Only With the Front View.

occurring during combustion. Incorporation of the throat was to minimize the perturbing ignition effects on the burn in the rectangular center portion of the sample cell. Burn rates for XM46 at the cold temperature could be obtained without gelling; thus, the increasing viscosity and/or the throat restriction provided a very beneficial effect. Incorporating a throat region in the sample cell brings up the possibility of an increased pressure within the cell. Experimental findings have led us to believe that is a negligible effect. First, since the throat area is enlarging as the burn progresses, any over-pressure would diminish toward the end of the burn. However, burn rates measured at the beginning of the burn are the same as toward the end of the burn. Moreover, the sample cell design would not **maintain** integrity for significant over-pressures.

The chromel-alumel thermocouple used to monitor the cell temperature was taped to an outside face of the sample cell in the midportion region. These three-piece sample cell assemblies are sandwiched together in a neoprene insulation sleeve and clear sealing fluids, which are composed of silicon oil or ethanol and Cabosil, and applied to the sample cell faces to provide enhanced thermal contact with the acrylic thermal masses. In addition, the **ethanol/Cabosil** was used to

dissolve frost buildup and thus maintain a good video observation path. Prior to an experiment, the sample cell assemblies are conditioned at hot or cold temperatures for 12 hr in a **temperature-conditioning** box.

The ingredients of various liquid-propellant mixtures for which data are presented are given in Table 1. The amounts are given in weight-percent. Here, the abbreviations are: TEAN (**triethanol-ammonium nitrate**) and DEHAN (**diethylhydroxyammonium nitrate**).

Table 1. Propellant Mixtures

Liquid Propellant	HAN	DEHAN	TEAN	Water
LP1845	63.2	0	20.0	16.8
xM46	60.8	0	19.2	20.0
LP4620	60.8	3.84	15.36	20.0
LP4640	60.8	7.68	11.52	20.0
LP1898	60.8	19.2	0	20.0
9.1 MHAN	60.8	0	0	39.2

3. Results

As a baseline from which to compare present data, three data sets obtained from previous work, conducted in this laboratory, are reproduced in Figure 3. These data sets are plotted on one figure since the perceived differences are minor; **LGP1845** is slightly more energetic than XM46, and one data set for XM46 uses half as much of a similar gelling agent. The straight lines on the figure correspond to least-squares fits of the XM46 data for a low- and a high-pressure range. This break in pressure dependence is not as abrupt as the straight-line intersection would indicate, but the phenomena is most definite. The XM46 data sets indicate this break to be in the neighborhood of **70 MPa**. Assuming an exponential burn-rate law, coefficients (A) and pressure exponents are obtained from a least-squares fit and tabulated in Table 2. Only XM46 gelled with 1% Rhamsam has been extended to **300 MPa** in pressure. Here, there is some indication that another pressure break exists around **250 MPa**. LGP1845 displays burn-rate behavior similar to XM46.

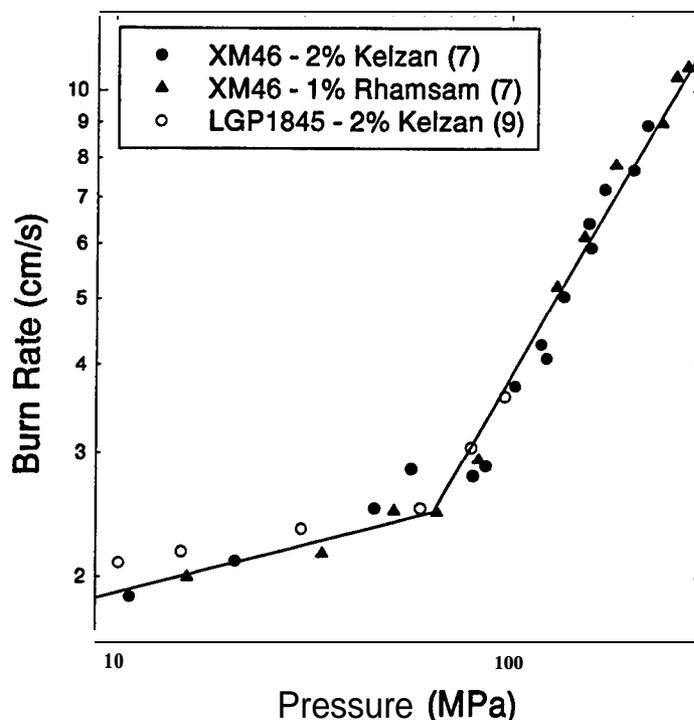


Figure 3. Windowed Strand Burner Burn-Rate Data for XM46 and LGP1845 as a Function of Pressure at Ambient-Temperature Conditions.

In order to further investigate possible mechanisms for the observed pressure break, a short time was spent in obtaining burn rates of 9.1 M HAN (a mix without the fuel component, ie TEAN fuel is replaced with water). Six experimental runs were made to determine the burn rate behavior for gelled 9.1 M HAN around the **70-MPa** pressure regime. These are shown with the gelled XM46 results in Figure 4. While the burning rate for 9.1 M HAN is similar to that of the low-pressure leg for XM46, there is no apparent indication of a sharp pressure break. A least-squares fit (exponential burn-rate law) to this data results in a pressure exponent value of 0.24 (see Table 2). Here, it is seen that the presence of the fuel component has a major effect on the burn rate at pressures exceeding about **70 MPa**. Further discussion of these observations is continued in the discussion section. More recently, another candidate liquid propellant (**LP1898**) has been formulated, with initial hopes of reducing pressure oscillations [9]. Replacement of TEAN with DEHAN in the XM46 mixture (**LP1898**) was thought to increase both the burn-rate and low-pressure ignitability. A comparison of gelled **LP1898** and XM46 is given on Figure 5. In general, the burn-rate behavior of **LP1898** is somewhat similar to XM46. There is a pressure break that appears, but at a lower pressure (about)

Table 2. Fitted Values for the Burn Rates of Various Propellant Samples When Using the Exponential Form $r = Ap^n$, Where r Is in Centimeters Per Second and p Is in Megapascals. Both the Fitted Values and Uncertainty Limits Come From a Regression Analysis.

Sample	Pressure Range (MPa)	A (cm/s)	n
XM46- 2% Kelzan	10-70	1.04 ± 0.11	0.24 ± 0.04
XM46 - 2% Kelzan	70-220	0.014 ± 0.004	1.19 ± 0.05
XM46 - 1% Rhamsam	10-70	1.27 ± 0.16	0.16 ± 0.04
XM46 - 1% Rhamsam	70-300	0.031 ± 0.008	1.04 ± 0.05
XM46 - 1% Rhamsam	70-240	0.024 ± 0.011	1.10 ± 0.09
XM46 - Ungelled - -50° C	10-70	2.29 ± 0.41	0.013 ± 0.05
KM46 - Ungelled - -50° C	100-176	0.0197 ± 0.016	1.07 ± 0.16
LGP1845 - 2% Kelzan	10-60	1.65 ± 0.01	0.10 ± 0.02
9.1 MHAN- 1% Rhamsam	30-180	1.09 ± 0.16	0.24 ± 0.03
LP1898 - 1.5% Rhamsam	10-50	1.09 ± 0.09	0.21 ± 0.025
LP1898 - 1.5% Rhamsam	70-200	0.029 ± 0.019	1.14 ± 0.13
xM46 - 1% Rhamsam ^a	20-73	1.87	0.10
KM46 - 1% Rhamsam ^a	73-190	0.017	1.2
LP4620 - 1% Rhamsam ^a	20-68	1.13	0.26
LP4620 - 1% Rhamsam ^a	68-170	0.03	1.1
LP4640 - 1% Rhamsam ^a	20-64	0.83	0.32
LP4640 - 1% Rhamsam ^a	64-170	0.032	1.24

^a Values obtained from Messina [8].

50 MPa). The burn rate of gelled LP1898, on the high-pressure leg, is about 1.5 times larger than that for XM46.

Investigations of the burning-rate behavior of KM46 at cold and hot conditions has also been undertaken [10]. It was experimentally observed that the cold (-50° C) KM46 could be made to burn with a flat surface without gelling; these burn-rate results, together with the ambient-temperature gelled data, are displayed in Figure 6. The low-pressure has considerable scatter, and the pressure exponent has large uncertainty. If the three lowest pressure points are

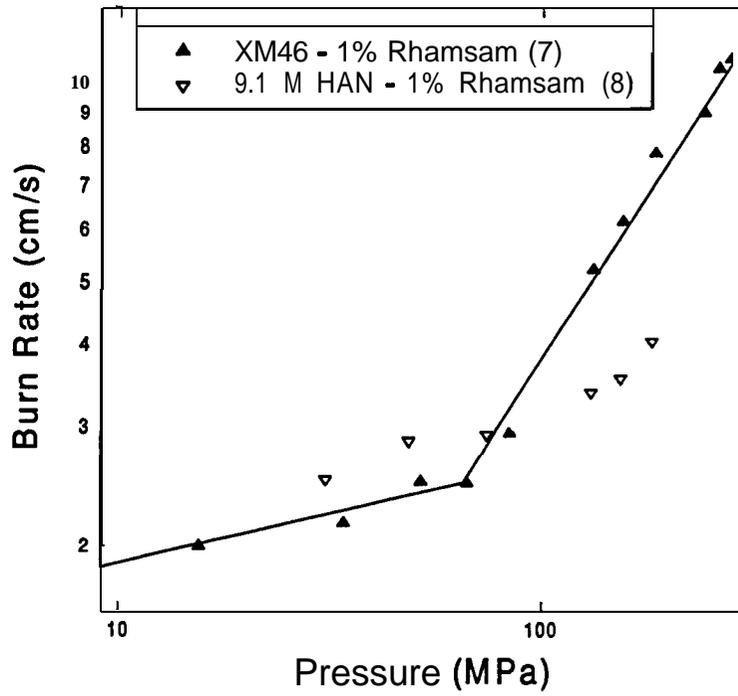


Figure 4. Burn-Rate Data Comparison Between 9.1 M HAN and XM46.

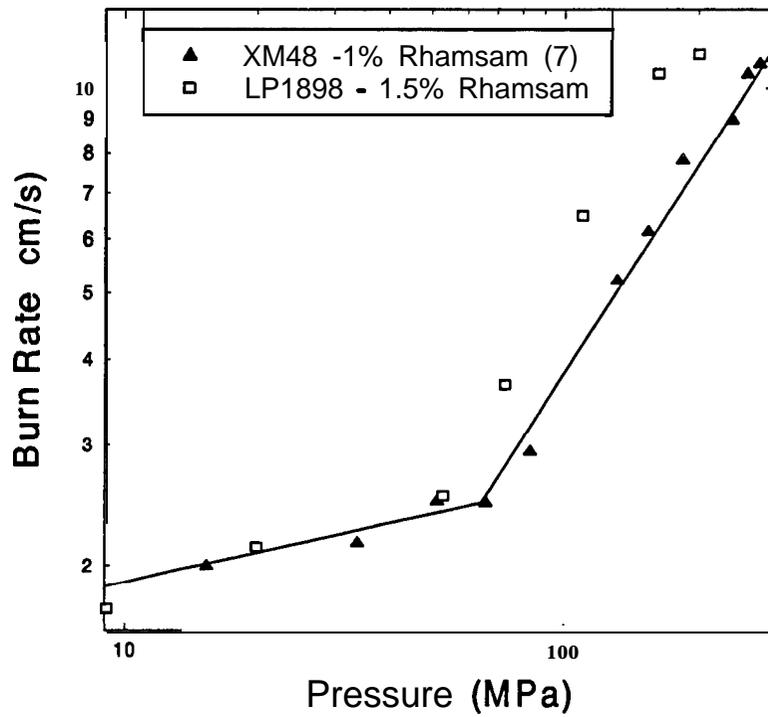


Figure 5. Burn-Rate Data Comparison Between LP1898 and XM46.

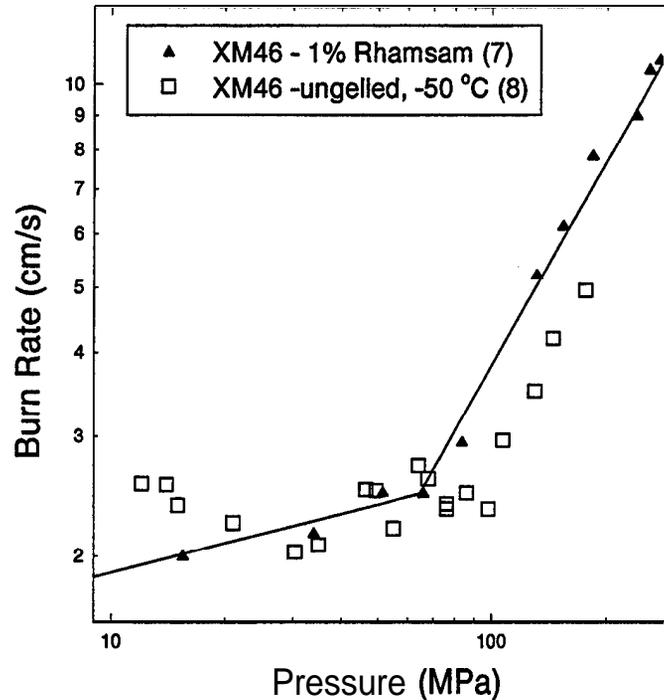


Figure 6. Comparison of the Burn Rates for Gelled XM46 at Ambient Temperature (25° C) and Ungelled XM46 at Cold Temperature (-50° C).

neglected, the ungelled data follow a trend similar to that shown for the ambient-temperature gelled case. The high-pressure-leg data has much less scatter and provides a pressure exponent (within experimental uncertainty) the same as for the ambient-temperature gelled condition (see Table 2.).

As an indication that the cold temperatures are maintained by the sample assembly for the time it takes to set up and run the experiment, an early thermocouple output for sample cell temperature is given in Figure 7. Zero time is when the sample cell assembly is removed from the temperature-conditioning box. A rapid change (decrease at 13.5 min) is observed when the windowed chamber is pressurized. This abrupt change is thought to be due to a nonuniform environment around the thermocouple connections and **feedthroughs**. When these **feedthroughs** are replaced with thermocouple material, the dip in the thermocouple trace is eliminated. As this change relaxes back, the liquid propellant sample is ignited and subsequently burns (14.3 min), giving rise to a sharp increase in temperature. After burn completion, the temperature again relaxes back to

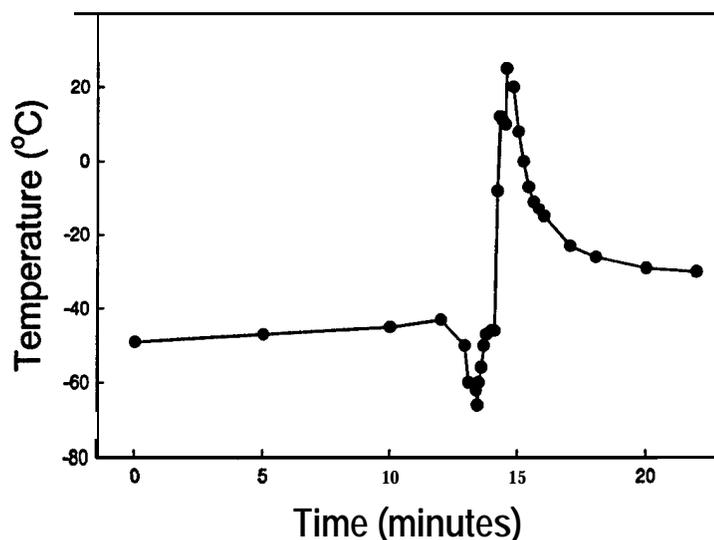


Figure 7. Temperature History of the Sample Cell Assembly for a Cold-Temperature Experiment.

values around -30° C. Other temperature histories at different pressures show similar behavior. These thermocouple data indicate that the temperature under which the experiment is **carried** out is typically within 5° C of the conditioning box temperature (-50° C).

Overnight conditioning of the gelled **XM46** at +65° C resulted in obtaining unstable burning surfaces. However, if the thermal blocks were conditioned overnight without the sample and then the sample placed in contact with the blocks long enough to reach temperature (about 0.5 hr), then the a stable bum surface could occasionally be obtained. Apparently, conditioning the gelled **XM46** at elevated temperatures for extended periods resulted in breaking down the gelling agent. Again, the temperature at which the experiment is carried out will be within 5° C of the conditioning box temperature (+65° C). Only four experimental points were obtained for this study, and, thus, pressure breaks are not obvious. If one uses the ambient temperature bum-rate behavior as a guide, then there are indications that the hot bum rates (Figure 8) are close to the ambient values on the low-pressure leg; the pressure break appears to occur at somewhat lower pressures, and the values for the high-pressure leg are larger than the ambient case.

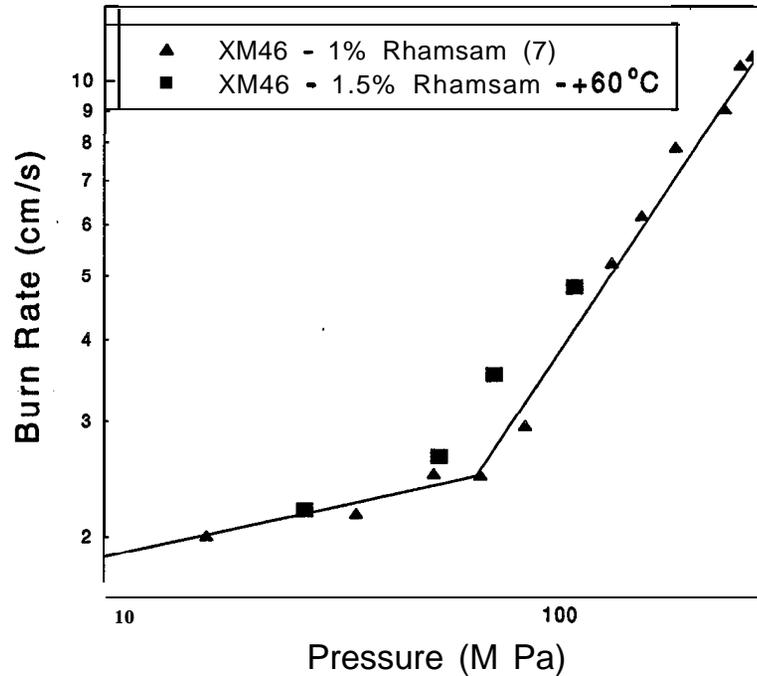


Figure 8. Comparison of the Burn-Rate Behavior Between Gelled XM46 at Ambient and +60° C.

4. Discussion

Consistent trends for ambient- and hot-temperature liquid-propellant burn rates have only been obtained by gelling. No other investigators have measured burn rates by visualization of the burning surface over this pressure range. As mentioned previously, Oberle and Wren [2] measured burn rates of ungelled liquid propellant with a closed-bomb technique. Here, the geometry of the burning surface has been assumed planar in order to extract burn rates from pressurization rates. Results of McBratney and Vanderhoff [7] are in disagreement with these extracted burn rates. Recently, Messina [8] has measured the burn rates for gelled **XM46**, **LP4620**, and **LP4640** using a pressure-fluctuation technique [11]. Results of these measurements are reported in Table 2. One of the objectives in their study [8] was to check against the work of McBratney and Vanderhoff [7, 10]. Reasonable agreement was found for the burn rate of gelled XM46 over the pressure range for the comparison. The values obtained by Messina were somewhat larger than those of McBratney and Vanderhoff. The break in the pressure exponent occurred at similar pressures. A direct comparison cannot be drawn for LP1898 since Messina measured mixtures of XM46 and LP1898

and we measured pure LP1898. However, trends can be pointed out. **LP1898** does not have a substantially higher bum rate than XM46. Through the pressure range studied, LP1898 bums, at most, 1.5 times faster than XM46. The bums rates for the mixtures studied by Messina fall within these bounds.

Over the course of these studies, there has been concern about gelling the liquid-propellant samples and the effect this may have on the burning rate. Evidence that gelling has a minimal effect on the burning rate comes from windowed chamber studies of KM46 at cold (-50° C) conditions, where bum-rate measurements were obtained without the need for gelling. These cold-temperature ungelled bum-rate results are about what one would calculate from taking ambient-temperature gelled values and applying a moderate-temperature-sensitivity correction. That is, the temperature sensitivity (α), defined as $\{\partial \ln r / \partial T\}_p$, calculated from the bum-rate results shown in Figure 6 is **0.005/° C** for the high-pressure leg. According to **Kubota [12]**, this value lies in the middle of the range of temperature-sensitivity values for conventional solid propellants. Actual temperature sensitivity values were not computed for the low-pressure (low-pressure exponent) leg due to large data scatter. However, one could speculate that the ambient-temperature and cold-temperature data were about the same-hence, no temperature sensitivity. This type of behavior has been observed. Experiments on binary mixtures of magnesium and sodium nitrate (candidate propellant for air augmented rockets) show that, for mixtures where the pressure exponent of the bum rate is small, the temperature sensitivity is also small [**13**]. Conversely, in the same study they show larger temperature sensitivities for mixtures where the pressure exponent of the burning rate is larger. While a case has been made for gelling having a minimal effect on the bum rate, the obvious set of measurements have not been made. Measurements for gelled KM46 at -50° C should be made and compared with the -50° C ungelled KM46 work.

The reason that liquid KM46 burned with a reasonably flat surface at the cold temperatures (nominally - 50 ° C) was assumed to be due to increases in viscosity. Over the temperature range from +25° C to -55 ° C, the dynamic viscosity increases from about 0.1 to 35 P. These viscosity data were obtained by Bair [**14**] for a pressure of 69 **MPa**. Zeldovich et al. [**15**] discuss combustion instabilities in liquids as related to viscosity and state:

“When the viscosity of the burning liquid is *sufficiently* high (on the order of 1 P) the stabilizing factor will be the viscosity, rather than the *surface* tension.”

Moreover, a stability criteria against hydrodynamic perturbations is given [15] for burning liquids under the influence of gravity. This relationship is

$$m^3 < gv(3\rho_1\rho_2)^{3/2} \text{ and } m = \rho_1u_n$$

for the case where the burning surface regresses downward. The symbols, units, and estimated values for liquid XM46 are given in Table 3. Using these values, the stability criterion is met for kinematic viscosity values greater than about 0.18 **cm²/s** or dynamic viscosity values of about 0.26 P. For XM46, at atmospheric pressure and above, the stability criterion is attained when **XM46** is cooled to temperatures below 0” C.

Table 3. Some Thermophysical Quantities for XM46 at +25° C and 70 MPa

Quantity	Symbol	units	Values for XM46
Mass flux of propellant	m	g/cm² s	3.6
Density of liquid propellant	ρ_1	g/cm³	1.45
Density of combustion products	ρ_2	g/cm³	0.0945”
Acceleration of gravity	g	cm/s²	980
Dynamic viscosity	ν_d	P	0.09
Kinematic viscosity	ν	cm²/s	0.06
Burning velocity	u_n	cm/s	2.5

^a Calculated from thermochemical equilibrium code.

Hot-temperature burn rates (about +60° C) for XM46 could only be obtained by gelling. Initially, experiments were conducted at +60° C using 1% Rhamsam gum as the gelling agent. Videos of the burn showed a surface destabilized behavior consisting of a negative burn cone with **wavelets** progressing up the sides of the cone. The gelling concentration was increased from 1 .0 to 1.5%. This change, along with minimizing the time the gelled sample was kept at the hot

temperature, provided stable burning behavior. The burn rates obtained were slightly larger than the gelled ambient results, with a similar pressure behavior.

The pressure break provides a convenient separation point for discussing possible differences in the combustion mechanisms of gelled XM46. Although the pressure break is depicted as a sharp change with the lines drawn in the figures, the actual transition from one pressure dependence to another is probably smoother, occurring over a finite-pressure regime. For pressures above about 70 MPa, the gelled regressing surface appears planar, with a sham line defining the burning surface. At pressures below about 70 MPa, two distinct patterns emerge. In the pressure range from about 25 to 70 MPa, the planar surface develops a slightly convex nature as the pressure is decreased, but the gas phase region above the surface remains transparent. Moreover, the line defining the burning surface is less distinct. Below about 25 MPa, the initially planar regressing surface develops inclined surfaces and a dark residue remains. Here, a wedge-shaped surface is observed where the gas phase area above is rendered mostly opaque due to residue coating the sample cell walls. This phenomena has been previously observed by McBratney [5] and is consistent with one of the major conclusions of Vosen [16], who deduced that the combustion of XM46 is a two-step process. The first step is liquid-phase decomposition of HAN, and the subsequent step is the decomposition of TEAN in the gas-phase HAN products. Vosen's conclusion was predicated on a post-analysis, where it was found that TEAN was the primary bum-residue ingredient.

In their studies of LP1845 (liquid propellant almost identical to XM46) Zhu and Law [17] report that the propellant explosion is initiated by a liquid-phase reaction of the HAN component. Thus, evidence is given for a condensed-phase HAN reaction as being the controlling or rate-limiting reaction for XM46 at low pressure (0.1 MPa). Additional evidence supporting this mechanism is the observed weak-pressure dependence of the bum rate for both gelled XM46 and ungelled XM46 (-50° C) at pressures below about 70 MPa. At pressures above 70 MPa, the pressure exponent attains values close to 1, which is suggestive of a controlling bimolecular reaction.

A few bum-rate measurements on gelled 9.1 M HAN were performed to further characterize the pressure break region. These measurements suggest no pressure break, a major change in behavior

due to the absence of the fuel component, TEAN, or DEHAN. Reactions controlling the burn rate remain weakly pressure-dependent throughout the pressure range investigated (30-200 MPa). Kounalakis and Faeth [18] have theoretically studied critical combustion properties of LGP1845 and XM46 and estimated a critical combustion pressure of 250 ± 125 MPa. This value is larger than the observed pressure break in the burn rate. These findings, together with the absence of a pressure break region for 9.1 M HAN, support the position that the pressure break is not a manifestation of critical point behavior.

5. Summary

In this report, burn-rate data have been presented for six different aqueous HAN-based mixtures. These data have been obtained as a function of pressure and, in one case, temperature as well. The pressure range covered extends from low pressure into gun condition pressures (10-300 MPa). Two distinctly different pressure regimes were found. At pressures below about 70 MPa, the burn rate is weakly pressure-dependant, whereas, at pressures from about 70-250 MPa, the burn rate is approximately linearly dependent on the pressure.

If these materials were to be seriously considered for propellant use at some future time, the following suggested study is proposed. While the burn-rate behavior of ungelled XM46 at -50° C is very similar to the behavior of gelled XM46 at ambient temperature, a more conclusive test would be to measure the burn rates of XM46 gelled and ungelled at -50° C.

If the results of this comparison showed identical behavior, then closed-bomb techniques for the burn rate measurement could possibly be developed. Gelled liquid propellant might be shaped into a disk and uniformly ignited in a closed-bomb vessel. Run-to-run reproducibility, as well as agreement with the optical strand burner data, would be necessary before applying the closed bomb to other samples or over different pressure ranges. The benefits of having a validated procedure for closed-bomb testing would be that the pressure dependence of the burn rate could be obtained in one run. Moreover, the pressure range could be extended further into the gun-pressure regime, 600 MPa.

INTENTIONALLY LEFT BLANK.

6. References

1. Coffee, T. P., P. G. **Baer**, W. F. Morrison, and **G. P. Wren**. “Jet Breakup and Combustion Modeling for the Regenerative Liquid Propellant Gun.” *Proceedings of the 26th JANNAF Combustion Meeting*, CPIA Pub. No. 529, p. **293**, 1989.
2. Oberle , W. F., and G. P. Wren. “Closed Chamber Combustion Rates of Liquid Propellant 1846 Conditioned Ambient, Hot and Cold.” *Proceedings of the 27th JANNAF Combustion Meeting*, CPIA Pub. No. **557**, p. **377**, 1990.
3. McBratney, W. F., B. D. Bensinger, and W. B. Arford. “Strand Combustion Rates for Some Liquid Monopropellants at Gun Functioning Pressures.” BRL-MR-2658, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, 1976.
4. Egorshv, V. Y., B. N. Kondrikov, and O. I. Yakovleva. “Combustion of Water-Impregnated Explosive Compounds.” *Fizika Goreniya IVzryva*, vol. **27**, no. **5**, pp. **56–63**, 1991.
5. McBratney, W. F. “Windowed Chamber Investigation of the Burning Rate of Liquid Monopropellant for Guns.” BRL-MR-03018, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, 1980.
6. McBratney, W. F. “Burning Rate Data, **LGP1845**.” **BRL-MR-03128**, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, August 1981.
7. McBratney, W. F., and J. A. Vanderhoff. “High Pressure Windowed Chamber Burn Rate Determination of Liquid Propellant XM46.” **ARL-TR-442**, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, June 1994.
8. Messina, N. “**4.3.4** Burn Rate Experiment.” FY96 Report for the Technology Base Program, pp. 130-135, Lockheed Martin Defense Systems, 1996.
9. Klein, N., T. P. Coffee, and C. S. **Leveritt**. “Pressure Oscillations in a Liquid Propellant Gun-Possible Dependence on Propellant Burning Rate.” ARL-TR-3361, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, June 1992.
10. McBratney, **W. F.**, and J. A. Vanderhoff. “Burn Rate Investigations of Liquid Propellant **XM46**.” *32nd JANNAF Combustion Meeting*, CPIA Publ. No. 631, October 1995.
11. Princeton Combustion Research Laboratories, Inc. “High Pressure Burn Rate Measurements on Gel/Slurries.” Final Report, **PCRL-FR-87-003**, April 1987.

12. Kubota, N. "Survey of Rocket Propellants and Their Combustion Characteristics." ***Fundamentals of Solid Propellant Combustion***, K. Kuo and M. Sommerfield (editors), AIAA ***Progress in Astronautics and Aeronautics Series***, vol. 90, 1984.
13. Singh, H., and R. B. Rao. "Temperature Sensitivity of Magnesium-Sodium Nitrate Propellants." ***Propellants, Explosives, Pyrotechnics***, vol. 15, pp. 250–253, 1990.
14. Bair, S. "Compressibility, Refractive Index and Viscosity of Liquid Gun Propellants." TR-TCN-92420, Contract **DAALO3-91-C-0034**, Georgia Institute of Technology, July 1993.
15. Zeldovich, Y. B., G. I. Barenblatt, V. B. Librovich, and G. M. Makhviladze. "The Mathematical Theory of Combustion and Explosions." Consultants Bureau, New York and London, pp. 521–523, 1985.
16. Vosen, S. R. "The Burning Rate of Hydroxylammonium Nitrate-Based Liquid Propellants." ***22nd Symposium (Int) on Combustion***, p. 1817, The Combustion Institute, 1988.
17. Zhu, D. L., and C. K. Law. "Aerothermal Studies of Energetic Liquid Materials: 1. Combustion of HAN-Based Liquid Gun Propellants Under Atmospheric Pressure." ***Combustion and Flame***, vol. 70, pp. 333-342, 1987.
18. Kounalakis, M. E., and G. M. Faeth. "Combustion of HAN-Based Liquid Monopropellants Near the Thermodynamic Critical Point." ***Combustion and Flame***, vol. 74, pp. 179–192, 1988.

NO. OF COPIES ORGANIZATION

2 DEFENSE TECHNICAL INFORMATION CENTER
DTIC DDA
8725 JOHN J KTINGMAN RD
STE 0944
FT BELVOIR VA 220606218

1 HQDA
DAMOFDQ
DENNIS SCHMIDT
400 ARMY PENTAGON
WASHINGTON DC 203 10-0460

1 OSD
OUUSD(A&T)/ODDDR&E(R)
RJ TREW
THE PENTAGON
WASHINGTON DC 20301-7100

1 DPTY CG FOR RDE
US ARMY MATERIEL CMD
AMCRD
MG CALDWELL
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 INST FOR ADVNCD **TCHNLGY**
THE **UNIV OF TEXAS AT AUSTIN**
PO BOX 20797
AUSTIN TX 78720-2797

1 DARPA
B KASPAR
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 NAVAL SURFACE WARFARECTR
CODE B07 J **PENNELLA**
17320 DAHLGREN RD
BLDG 1470 RM 1101
DAHLGREN VA 22448-5 100

1 US MILITARY ACADEMY
MATH **SCI CTR** OF EXCELLENCE
DEPT OF MATHEMATICAL SCI
MAJMDPHILLIPS
THAYER HALL
WEST POINT NY 10996-1786

NO. OF COPIES ORGANIZATION

1 DIRECTOR
US ARMY RESEARCH LAB
AMSRL D
R W WHALIN
2800 POWDER MILL RD
ADELPHI MD 20783-1 145

1 DIRECTOR
US ARMY RESEARCH LAB
AMSRL DD
J J ROCHIO
2800 POWDER MILL RD
ADELPHI MD 20783-1 145

1 DIRECTOR
US ARMY RESEARCH LAB
AMSRL CS AS (RECORDS MGMT)
2800 POWDER MILL RD
ADELPHI MD 20783-1 145

3 DIRECTOR
US ARMY RESEARCH LAB
AMSRL CI LL
2800 POWDER MILL. RD
ADELPHI MD 20783-1 145

ABERDEEN PROVING GROUND

4 DIR **USARL**
AMSRL CI LP (305)

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

41 DIR, USARL
AMSRL-WM-B,
A.W. HORST
AMSRL-WM-BD,
B.E. FORCH
G.F. ADAMS
W.R. ANDERSON .
R.A. BEYER
S.W. BUNTE
C.F. CHABALOWSKI
s. COLEMAN
A. COHEN
R. CUMPTON
R. DANIEL
D. DEVYNCK
R.A. **FIFER**
J.M. HEIMERL
B.E. **HOMAN**
A. JUHASZ
A.J. KOTLAR
R. KRANZE
E. LANCASTER
W.F. **MCBRATNEY**
K.L. MCNESBY
M. MCQUAID
N.E. MEAGHER
M.S. MILLER
A.W. **MIZIOLEK**
J.B. MORRIS
J.E. **NEWBERRY**
S.V. PAI
R.A. PESCE-RODRIGUEZ
J. **RASIMAS**
P. REEVES
B.M. RICE
P. SAEGAR
R.C. SAUSA
M.A. SCHROEDER
R. **SCHWEITZER**
L.D. SEGER
J.A. VANDERHOFF
D. VENIZELOS
A. WHREN
H.L. WILLIAMS

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE March 1999	3. REPORT TYPE AND DATES COVERED Final, Jan 93 - Dec 96	
4. TITLE AND SUBTITLE Burn-Rate Investigations of HAN-Based Candidate Liquid Propellants			5. FUNDING NUMBERS 1L161102AH43	
6. AUTHOR(S) W. F. McBratney and J. A. Vanderhoff				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) J.S. Army Research Laboratory ATTN: AMSRL-WM-BD Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-1927	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) High-pressure windowed strand burners have been used to obtain burning rates for some hydroxyl ammonium nitrate (HAN) liquid propellants over the pressure range from about 10 to 300 MPa. Measured linear burn rates for these liquids were erratic due to the manifestation of surface irregularities. This burning surface variable has been minimized by gelling. A pressure break occurs around 80 MPa for these gelled propellants. The burn rate (r) vs. pressure (p) can be adequately expressed by an exponential of the form $r = Ap^n$. For pressures below 70 MPa, $n \sim 0.2$, and for pressures between 70 and 300 MPa, $n \sim 1.1$. One HAN-based liquid propellant, XM46, has been investigated as a function of temperature as well. Due to the substantial increase in viscosity, cold-temperature ($\sim -50^\circ\text{C}$) burn rates were obtained without the use of any gelling agent. These cold temperature burn rates are slightly lower than the ambient temperature rates and follow a similar pressure behavior at pressures above about 30 MPa. Hot-temperature ($\sim +60^\circ\text{C}$) gelled XM46 burn rates are slightly larger than the ambient-temperature rates, again with a similar pressure behavior. Burn rates were also determined for gelled 9.1 M HAN through the 70-MPa pressure region, but no convincing evidence of a similar pressure break was observed.				
14. SUBJECT TERMS burning rate, propellant, liquid, temperature, pressure			15. NUMBER OF PAGES 25	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. **ARL** Report Number/Author ARL-TR- 1927 (McBratney) Date of Report March 1999

2. Date Report Received _____

3. Does this report **satisfy** a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT ADDRESS	_____
	Organization
	Name _____ E-mail Name _____
	Street or P.O. Box No. _____
	City, State, Zip Code _____

7. **If** indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD ADDRESS	_____
	Organization
	Name _____
	Street or P.O. Box No. _____
	City, State, Zip Code _____

(Remove this sheet, 'fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)