

NASA/TM—2009-215680

ARL—TR—4719
GT2009—59568



Engine Conceptual Design Studies for a Hybrid Wing Body Aircraft

*Michael T. Tong, Scott M. Jones, and William J. Haller
Glenn Research Center, Cleveland, Ohio*

*Robert F. Handschuh
U.S. Army Research Laboratory, Glenn Research Center, Cleveland, Ohio*

NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at 443-757-5803
- Telephone the NASA STI Help Desk at 443-757-5802
- Write to:
NASA Center for AeroSpace Information (CASI)
7115 Standard Drive
Hanover, MD 21076-1320



Engine Conceptual Design Studies for a Hybrid Wing Body Aircraft

*Michael T. Tong, Scott M. Jones, and William J. Haller
Glenn Research Center, Cleveland, Ohio*

*Robert F. Handschuh
U.S. Army Research Laboratory, Glenn Research Center, Cleveland, Ohio*

Prepared for the
Turbo Expo 2009
sponsored by the American Society of Mechanical Engineers
Orlando, Florida, June 8–12, 2009

National Aeronautics and
Space Administration

Glenn Research Center
Cleveland, Ohio 44135

Acknowledgments

The authors would like to acknowledge Dr. Timothy Krantz of the U.S. Army Research Laboratory for the development of the gearbox and lubrication system weight correlation used in this study, and Mr. Christopher Snyder for his comments on the paper.

This work was sponsored by the Fundamental Aeronautics Program
at the NASA Glenn Research Center.

Level of Review: This material has been technically reviewed by technical management.

Available from

NASA Center for Aerospace Information
7115 Standard Drive
Hanover, MD 21076-1320

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161

Available electronically at <http://gltrs.grc.nasa.gov>

Engine Conceptual Design Studies for a Hybrid Wing Body Aircraft

Michael T. Tong, Scott M. Jones, and William J. Haller
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Robert F. Handschuh
U.S. Army Research Laboratory
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Abstract

Worldwide concerns of air quality and climate change have made environmental protection one of the most critical issues in aviation today. NASA's current Fundamental Aeronautics Research program is directed at three generations of aircraft in the near, mid and far term, with initial operating capability around 2015, 2020, and 2030, respectively. Each generation has associated goals for fuel burn, NO_x, noise, and field-length reductions relative to today's aircrafts. The research for the 2020 generation is directed at enabling a hybrid wing body (HWB) aircraft to meet NASA's aggressive technology goals. This paper presents the conceptual cycle and mechanical designs of the two engine concepts, podded and embedded systems, which were proposed for a HWB cargo freighter. They are expected to offer significant benefits in noise reductions without compromising the fuel burn.

Introduction

More passengers and cargo are moved by air today than ever before, because of the global economy and worldwide connectivity. Over the next 15 to 20 years, the volume of air traffic is expected to at least double (for passenger traffic) or even triple (for cargo traffic) (Refs. 1 and 2). This robust growth rate causes growing concerns about the contribution that aircraft emissions will have on local air quality and global climate change. Chemical emissions of concern consist of anything that affects local air quality, global climate, or atmospheric ozone, including CO₂, NO_x, sulfur oxides, water vapor and particulates (Ref. 3). For carbon based fuels, there is a 1:1 relationship between the amount of fuel burned and the amount of CO₂ generated. Aviation noise can have adverse impacts on property values, airport expansion, and prompts operational restrictions on existing runways that increase congestion, leading to travel and shipping delays (Ref. 4). It is generally recognized that significant improvement to the environmental acceptability of aircraft will be needed to sustain long term growth. The ability of the nation to benefit from continued growth in aviation depends on the development of future aircrafts that can meet demanding environmental and performance challenges.

To achieve environmental protection that allows sustained long-term aviation growth, NASA has been engaged in the development of revolutionary aero-propulsion technologies and aircraft concepts with specific objectives to reduce aircraft fuel burn, noise, and NO_x emissions while satisfying the field length constraints. Under the Subsonic Fixed Wing (SFW) project of its Fundamental Aeronautics Program, NASA's aeronautics research is directed at three generations of aircraft in the near, mid and far term, with initial operating capability (IOC) around 2015, 2020, and 2030, respectively. Each generation has associated goals for reductions in noise, emissions, fuel burn, and field length relative to today's aircraft. The three generations of aircraft are designated as 'N+1', 'N+2', and 'N+3', respectively. The research for 'N+2' and 'N+3' are directed at enabling new vehicle configurations to meet NASA's aggressive system-level goals. The 'N+1' and 'N+2' goals, as defined in the 2007 NASA Research Announcement request for proposal, are shown in Table 1.

NASA funded a 1-year Phase-1 effort to study the potential of a Hybrid Wing Body type aircraft to meet the N+2 system-level goals. This study was to focus on the noise goal of -42 dB relative to Federal Aviation Regulations Part 36 (FAR 36) Stage 4 (-52 dB relative to Stage 3) while meeting the fuel goal of -25 percent relative to the current state-of-the-art aircraft. Boeing Phantom Works, teamed with Massachusetts Institute of Technology (MIT) and University of California Irvine, proposed to perform the study on a freighter aircraft. Both Boeing and Airbus forecasted the demand for cargo air traffic will grow at a higher rate than passenger airliners in the next 20 years (Refs. 1 and 2). The team was chosen to conduct the study.

Boeing, with its extensive background in blended wing body type aircraft, proposed two engine concepts for a hybrid wing body (HWB) freighter aircraft, for the 2020 timeframe—the conventional pylon-mounted 'podded' and the futuristic 'embedded' systems. The HWB configurations with podded and embedded engines were designated as 'N2A' and 'N2B', respectively.

The N2A podded engine configuration was considered to be 'lower risk' for the 2020 timeframe, because of its low engine operability risk. The N2B with embedded engines was considered to be a 'higher risk' configuration, because of its

TABLE 1.—NASA SUBSONIC FIXED WING SYSTEM-LEVEL GOALS

	N+1 generation conventional IOC 2015	N+2 generation hybrid wing IOC 2020
Noise (cumulative below Stage 4)	-32 dB	-42 dB
Landing-and-takeoff NO _x emissions (below CAEP/6)	-60%	-75%
Aircraft fuel burn (relative to ^a B737/CFM56)	^b -15%	^c -25%

^aN+2 baseline changed to B777/GE90 in 2008

^b-33% with laminar flow control

^c-40% with laminar flow control

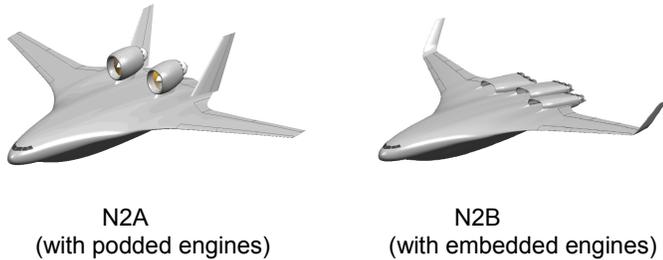


Figure 1.—HWB aircraft-engine configurations.

complexities associated with closely coupled engine/airframe and boundary layer ingestion inlets. The closely coupled engine/airframe has the potential to reduce the engine-airframe integration penalties. The N2B was to be derived from the “Silent Aircraft” (Refs. 5 and 6). The HWB aircraft-engine configurations with two types of engine are shown in Figure 1.

Under the contractual agreement, NASA Glenn Research Center (GRC) agreed to perform engine conceptual design studies and provide the engine data to support Boeing’s effort. The design studies were for four podded engines with fan pressure ratios (FPR) of 1.4, 1.5, 1.6, and 1.7, and one embedded engine with FPR1.5 (mutually agreed to be the same as the Silent Aircraft engine). This paper presents the conceptual cycle and mechanical designs of the two engine concepts proposed for the ‘N+2’ generation freighter aircraft.

Hybrid Wing Body (HWB) Aircraft

A hybrid wing body aircraft is an alternative airframe design in which the fuselage blends seamlessly with the wings to form a hybrid flying-wing configuration (Ref. 7). It also incorporates many design features from the conventional ‘tube with wings’ aircraft. Because of its high-lift wings and wide airfoil-shaped body (thus better aerodynamic efficiency), the HWB aircraft reduces the drag and fuel burn. Fully integrating the HWB airframe and the engines, e.g., embedded engines, will allow the aerodynamic efficiency to be maximized, which would further improve the aircraft performance. Also, if the engines are installed above the wing, the engine noise will be shielded by the aircraft’s wide body and wing span and thus the aircraft will potentially operate quieter than the conventional aircraft.

A very quiet HWB airplane would not be limited by current operational curfews, such as night operations into noise-sensitive airports. The flexibility of operations, in combination with the worldwide trend towards widespread use of just-in-time delivery, would further stimulate the cargo growth and the demand for freighter aircrafts.

Aircraft Mission Requirements

Boeing defined the mission requirements for a HWB cargo freighter aircraft. They are:

- Payload of 103,000 lb;
- Range of 6000 nm;
- 35000 ft initial cruise altitude or higher;
- Time to climb through 31,000 ft not greater than 30 min;
- Cruise Mach number of 0.8;
- Field length of 10,000 ft or less

Propulsion System Design

Propulsion System Design Requirements

Based on the mission requirements, the propulsion system requirements were defined as follows:

For the podded twinjet engine system:

- Aerodynamic design point (ADP): Mach number 0.8 at 31,000 ft;
- Thrust (per engine) = 15000 lb at International standard atmosphere (ISA +0)
- Rolling takeoff (RTO) at Mach no. 0.25, sea level: thrust (per engine) = 54000 lb (at ISA+15C/ISA+27F); for the embedded system (three engines, 9 fans):
- Aerodynamic design point (ADP): Mach number 0.8 at 31,000 ft; thrust (per engine) = 10000 lb at ISA+0)
- Rolling takeoff at Mach no. 0.25, sea level: thrust (per engine) = 36000 lb (at ISA+15C/ISA+27F);

Engine Cycle Design

Cycle design involves simultaneously solving aerodynamic design point and off-design parameters. Four podded engines with FPR of 1.4, 1.5, 1.6, and 1.7 were modeled. Of these engines, the FPR1.4 and FPR1.5 engines were geared; the others were direct-drive. One embedded engine with FPR of 1.5 was modeled. It has three propulsion modules that were each composed of a gas generator that drove an inline fan and two additional outboard fans through a mechanical drive train.

The NASA software tool, NPSS (Numerical Propulsion System Simulation) (Refs. 8 and 9), was used for this task that ultimately calculated engine thrust and specific fuel consumption for each of the engines. All engines were developed with the same ADP (Mach number, altitude, thrust).

The ADP was selected to represent a nominal top-of-climb (TOC) condition for the hybrid wing airframe cargo freighter. Inlet mass flow for each engine was selected to achieve the net thrust requirement at ADP and bypass ratio was set to achieve an extraction ratio (ratio of total pressures for bypass nozzle and core nozzle) of 1.25 at the ADP for all engines. In addition to meeting a thrust target at TOC conditions, a sea-level rolling takeoff thrust target was also met by adjusting design point burner fuel-to-air ratio.

A maximum high-pressure turbine (HPT) inlet temperature of 3460 °R and maximum HPT rotor inlet temperature of 3310 °R (with cooling air) were assumed, reflecting the use of advanced high temperature materials. Also, a maximum low-pressure turbine (LPT) rotor inlet temperature of 2460 °R was used to eliminate the LPT cooling.

Assumptions for fan, low pressure compressor (LPC), efficiencies were based on technology trend curves recently developed by the Aerospace Systems Design Lab (ASDL) at Georgia Tech for use in the FAA’s Environmental Design Space (EDS) system (Ref. 10). These curves have been reviewed by the EDS Independent Review Group, which includes industry representatives and is shown in Figures 2 and 3. For the high pressure compressor (HPC), a constant polytropic efficiency of 91.5 percent was assumed for all the engines. For the FPR1.4 and FRP1.5 engines, a variable area fan nozzle was needed to achieve the targeted 20 percent surge margin across the operating envelope. For the FPR1.6 and FPR1.7 engines, an acceptable surge margin was achievable with fixed geometry nozzles and the extra weight of a variable area nozzle was not justified.

General cycle characteristics of the podded engines are shown in Table 2. For the embedded engine, they are shown in Table 3. These data were generated with the inlet pressure recoveries provided by Boeing. For the podded engines, the

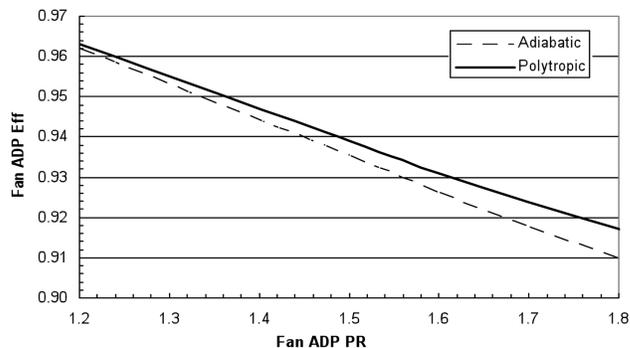


Figure 2.—Variation of fan efficiency with pressure ratio.

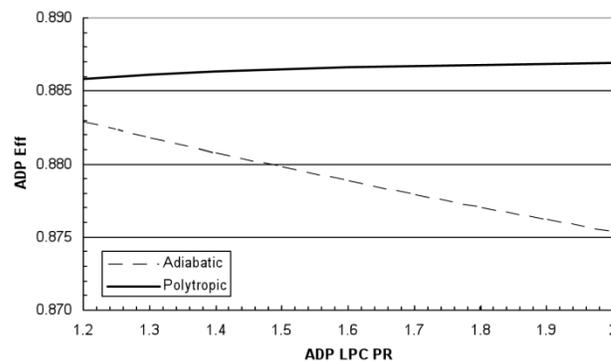


Figure 3.—Variation of LPC efficiency with pressure ratio.

inlet pressure recoveries were 0.998 at the ADP. For the embedded engine, they were 0.946 and 0.960 (with boundary layer ingestion) for the center and the side inlets, respectively Engine Mechanical Design.

TABLE 2.—GENERAL CYCLE CHARACTERISTICS OF PODDED ENGINE MODELS

	FPR = 1.40	FPR = 1.50	FPR = 1.60	FPR = 1.70	FPR = 1.40	FPR = 1.50	FPR = 1.60	FPR = 1.70
	SLS (ISA+27 °F)	ADP (ISA+0)						
Fan Pressure Ratio (FPR)	1.35	1.40	1.46	1.50	1.57	1.60	1.70	1.70
Bypass Ratio (BPR)	17.41	16.55	12.86	12.41	9.94	9.76	7.91	7.93
Overall Pressure Ratio (OPR)	43.7	48.4	43.6	46.4	43.5	44.9	43.6	43.6
Net Thrust per engine, lb	74859	15001	71838	15001	69755	15001	68256	15001
TSFC, lb/(lb-h)	0.220	0.474	0.253	0.495	0.283	0.516	0.313	0.537
HPT inlet temp. (T4), °R	3460	3048	3460	3000	3460	2969	3460	2947
HPT rotor inlet temp. (T41), °R	3310	2913	3310	2868	3310	2838	3310	2817
LPT rotor inlet temp., °R	2460	2144	2460	2109	2460	2084	2460	2067

SLS = Sea level static
ADP = Aerodynamic design point
ISA = International standard atmosphere

TABLE 3.—EMBEDDED ENGINE CYCLE PARAMETERS

	SLS (ISA+27 °F)	ADP (ISA+0)
Fan Pressure Ratio (FPR)	1.49	1.50
BPR (Center or core engine only)	3.2	3.1
Effective BPR (Core and outboard engines)	11.5	11.3
Overall Pressure Ratio (OPR)	45	46
Net thrust per engine (3 fans), lb	49060	10000
TSFC, lb/(lb-h)	0.288	0.564
HPT inlet temp. (T4), °R	3460	3010
HPT rotor inlet temperature (T41), °R	3310	2876
LPT rotor inlet temperature, °R	2460	2113

The podded-engine system for the HWB cargo freighter is a twinjet (2 engines) system. For this system, four engine designs with fan pressure ratios (FPR) of 1.4, 1.5, 1.6, and 1.7 were modeled. The basic common engine architecture for these engines is a two spool turbofan. Of these engines, the FPR1.4 and FPR1.5 engines were geared to reduce the number of LPC and LPT stages; the others were direct-drive.

The embedded-engine system for the HWB cargo freighter is a 3-engine configuration with a total of 9 fans. Each embedded engine is composed of a gas generator (core engine) that drove an inline fan and two additional outboard fans through a mechanical drive train. For this concept, one engine design with FPR of 1.5 was modeled.

The NASA software tool WATE (Weight Analysis of Gas Turbine Engines) (Refs. 11, 12, and 13) was used to create engine architectures that could achieve the engine thermodynamic cycle detailed in the previous section. Since WATE's original release in 1979, substantial improvements have been made to enhance its capability and improve its accuracy. Many of the empirical relationships have been replaced with analytical weight and dimension calculations. An approach is used where the stress level, maximum temperature and pressure, material, geometry, stage loading, hub-tip ratio, blade/vane counts, and shaft speed are used to determine the component weight. An updated gearbox-weight correlation is also included in the code.

The cycle data required for WATE execution, such as airflow, temperatures, and pressures, pressure ratios, bypass ratios, etc., was derived from NPSS output. Both the ADP and off-design cases were used to encompass the maximum performance level required for each engine component. This data, the material properties, and design rules for geometric, stress, and turbomachinery stage-loading limits were used to determine the acceptable engine layout.

Advanced materials were assumed to accommodate higher engine operating temperatures and to reduce the weight. A complete summary of the advanced engine materials assumed is shown in Table 4.

Both highly-loaded and conventional turbomachinery stage-loading cases were studied. Using highly-loaded turbomachinery can reduce the number of compressor and turbine stages, reducing component and engine weights and lengths, but with a trade-off of component and overall efficiency. Based on the results, it was mutually agreed between GRC and Boeing that the small differences in weight (<2 percent) and overall dimensions (<6 percent in length) would not compensate for the overall efficiency degradation with the highly-loaded turbomachinery. In this paper, only the results based on conventional turbomachinery loadings are presented.

For the podded engines the core nozzles were axisymmetric, and variable area fan nozzles were used for the FPR1.4 and FPR1.5 engines. It was assumed that the variable-area geometry (to be actuated by shape memory alloy) would increase the nozzle weight by 10 percent (Ref. 14). For the embedded engines, vectoring 2-D variable-area nozzles were used. The length of the nozzle was set at 2 fan diameters to provide the space for the acoustic liners. Tables 5 and 6 summarize the parameters of the podded and embedded engines. The engine layouts for estimating performance and weights are shown in Figures 4 and 5. For the embedded engine, the boundary-layer-ingestion inlet and nacelles were considered part of the airframe and were designed by Boeing.

TABLE 4.—ADVANCED ENGINE MATERIAL ASSUMPTIONS AND THEIR APPLICATIONS

Component	Blade	Vane	Disk	Case
Fan	Polymer matrix composite	Polymer matrix composite	Current state-of-the-art materials	Polymer matrix composite wrapped by Zylon
LPC	Titanium aluminide	Titanium aluminide	Current state-of-the-art materials	Polymer matrix composite
HPC (Hot section)	Titanium aluminide	Titanium aluminide	Current state-of-the-art materials	Titanium metal matrix composite
HPT and LPT	5th generation nickel-based alloy	5th generation nickel-based alloy	Nickel-based powder metallurgy alloy	Current state-of-the-art materials
Inlet/Nacelle	N/A	N/A	N/A	Polymer matrix composite

TABLE 5.—PRINCIPAL MECHANICAL PARAMETERS FOR THE PODDED ENGINES

Configuration	FPR1.4	FPR1.5	FPR1.6	FPR1.7
	Two-spool geared turbofan	Two-spool geared turbofan	Two-spool direct drive turbofan	Two-spool direct drive turbofan
Fan dia., in.	126.6	115.1	106.8	100.3
Fan blade/vane counts	18/46	18/46	18/46	18/46
Max. fan tip speed, ft/sec	1119	1297	1450	1580
Fan hub/tip ratio	0.31	0.31	0.31	0.31
Fan stage loading ^a	0.28	0.25	0.24	0.23
LPC stages	2	2	5	4
HPC stages	9	9	8	8
HPC min. blade ht., in.	0.62	0.69	0.73	0.79
HPT stages	2	2	2	2
LPT stages	3	3	6	5
Fan nozzle type	Variable area	Variable area	Fixed area	Fixed area
Total engine pod wt., lb	19007	16191	15513	13314
Bare engine length, in.	178.4	166.3	185.6	164.8

TABLE 6.—PRINCIPAL MECHANICAL PARAMETERS FOR THE EMBEDDED ENGINE

Configuration	Multiple fan system
Fan dia., in.	56
Fan blade/vane counts	18/44
Max. fan tip speed, ft/sec	1297
Fan hub/tip ratio	0.31
Fan stage loading ^a	0.25
LPC stages	5
LPC blade/vane counts	193/360
HPC stages	9
HPC blade/vane counts	554/824
HPC min. blade ht. (in.)	0.68
HPT stages	2
HPT blade/vane counts	111/67
LPT stages	5
LPT blade/vane counts	657/436
Nozzle type	2-D variable area
Engine weight (includes accessories, with no transmission), lb	12,652
Transmission and lubrication system weight, lb	1,139
Total engine weight (excludes inlet), lb	13791

$$^a\text{Fan stage loading} = \frac{\Delta h}{\frac{1}{2}U_i^2(1+h/t)^2}$$

Δh = change in stagnation enthalpy
 U_i = blade tip speed
 h/t = blade hub-to-tip ratio

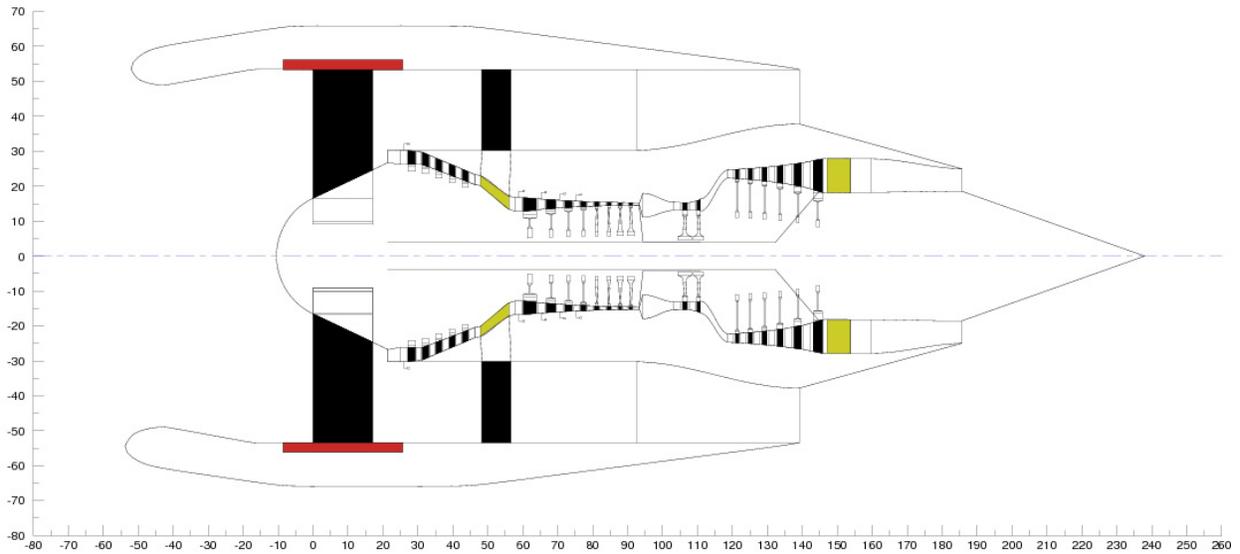


Figure 4.—FPR1.6 podded engine internal layout (dimensions in inches).

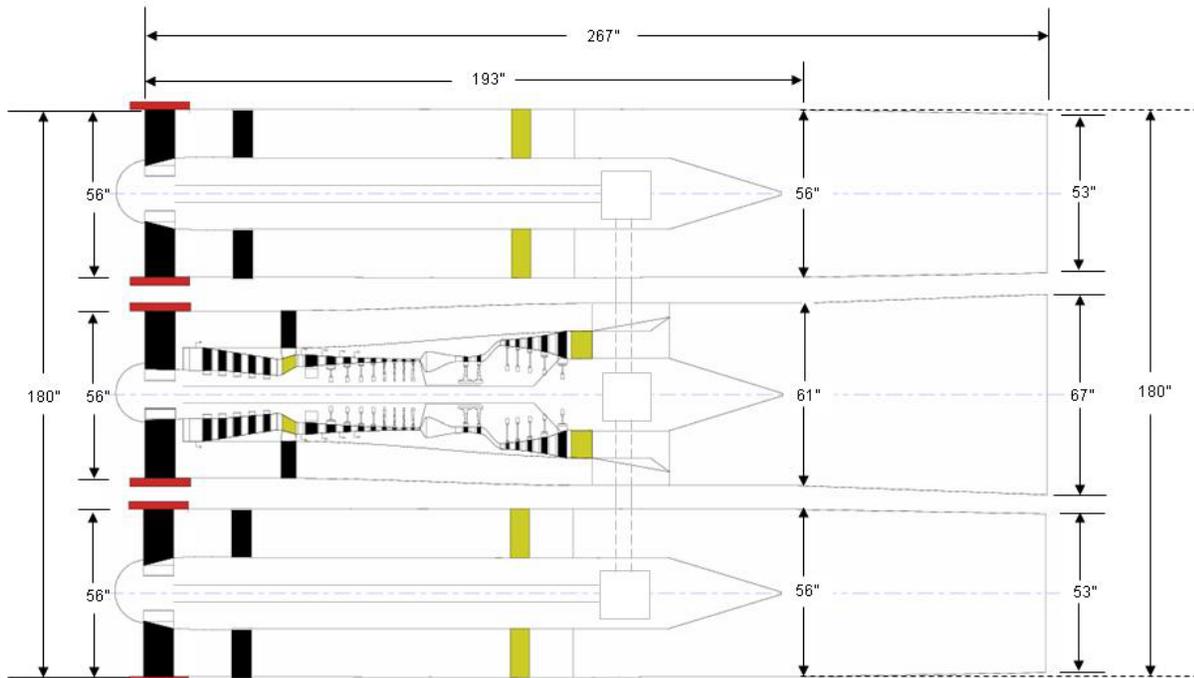


Figure 5.—Embedded engine internal layout.

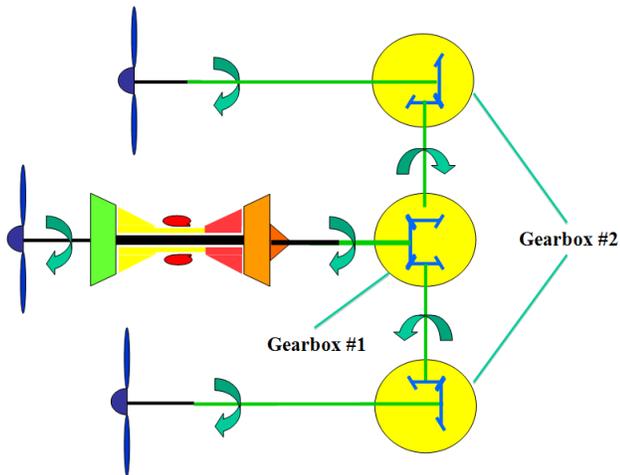


Figure 6.—The gear-drive system configuration.

Transmission Design for the Embedded Engine

Each embedded engine is composed of a gas generator that drove an inline fan and two additional fans through a mechanical drive train. The mechanical drive train was designed to be powered from the low pressure turbine (LPT) through angle gearboxes to adjacent fans. The gear-drive system configuration is shown in Figure 6.

The gearboxes were designed using the calculation procedure for spiral bevel gears via the American Gear Manufacturers Association (AGMA, (Ref. 15)). The load (power) was assumed to be split equally between the three fans. Therefore the gearbox driven directly by the power turbine was designed to transmit ~35 khp (Figure 6, Gearbox #1), or 2/3 of the power, and then split the power to the adjacent gearboxes to drive the two parallel outboard fans (Figure 6, Gearboxes #2). The gearbox arrangements also considered overall size to minimize the cross-sectional area down stream of the turbine and fans. Gearbox #1 was penalized during the design process since the pinion drives two gears. State-of-the-art materials and manufacturing processes would be required for all gearbox system components. The gearing design parameters are shown in Table 7.

TABLE 7.—THE GEARING DESIGN PARAMETERS
 Gearbox #1 - 35528 hp, 5009 RPM
 Gearbox #2 - 17764 hp, 4994 RPM

	Gearbox #1	Gearbox #2
Number of teeth pinion/gear	48/25	27/52
Diametral pitch, 1 in.	2.5	3.0
Spiral angle, degrees	25	25
Face width, in.	3.5	3.25
Outside diameter, in.	19.41/10.94	9.79/17.51
Pinion bending stress, ksi	64.3	67.2
Gear bending stress, ksi	67.4	68.6
Contact stress, ksi	184.2	182.2
Pitch line velocity, ft/min.	25178	22660

$$\text{Parametric Value} = (\text{hp}/\text{RPM}_{\text{out}})^{0.75} * (\text{RPM}_{\text{in}}/\text{RPM}_{\text{out}})^{0.15}$$

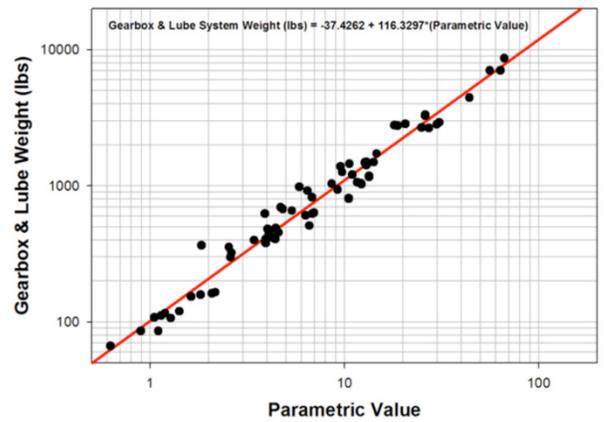


Figure 7.—Rotorcraft transmission and lubrication system weight data.

An empirical correlation, shown in Figure 7, was used to calculate the weight of the transmission and lubrication system. The correlation was developed based on actual weight data from over fifty rotorcrafts, tiltrotors, and turboprop aircrafts. They are also plotted in Figure 7. Using this parametric fit permitted gearbox weight to be estimated for the purposes of this study.

Aircraft Mission and Sizing Studies

With the engine data provided by GRC, Boeing used its BIVDS (Boeing Integrated Vehicle and Design System) tool suite to perform airplane mission and sizing analyses, based on an 11112-km (6000 n mi) economic mission. The results have been reported in Reference 16. For the podded engines, they are summarized in Table 8.

TABLE 8.—MISSION AND SIZING RESULT COMPARISONS FOR THE PODDED ENGINES

	1.4	1.5	1.6	1.7
Ground rules:				
	<ul style="list-style-type: none"> • 6000 nm range • 30 min time to climb through 31000 ft • 35,000 initial cruising altitude (ICA) • Hot-day takeoff: ISA+27 °F 			
Fan pressure ratio	1.4	1.5	1.6	1.7
Maximum takeoff gross weight, lb	464,700	460,700	461,500	463,700
Payload, lb	103,000	103,000	103,000	103,000
Static sea level thrust, lb	74,862	71,837	69,757	68,258
Fuel burn, lb	118,573	120,939	125,051	129,127
Engine outfield length, ft	6,214	5,942	6,196	6,320

Boeing used the fuel-burn trend band for current cargo freighters (B767-300ER, A330-200, etc.) for the comparison. It showed that the N2A (with FPR1.6 podded engines) exceeds N+2 fuel burned goal at -29 percent. Although both the FPR1.4 and FPR1.5 geared engines had lower fuel burn, the FPR1.6 engine was deemed to have lower risk for the 2020 IOC time frame. It was selected for the noise study. With the embedded engines, the N2B met the fuel-burn goal at -25 percent. Those results are summarized in Table 9.

TABLE 9.—MISSION AND SIZING RESULTS FOR THE EMBEDDED ENGINE

Ground rules:	
	<ul style="list-style-type: none"> • 6000 nm range • 30 min time to climb through 31000 ft • 35,000 ICA • Hot-day takeoff: ISA+27 °F
Fan pressure ratio	1.5
Maximum takeoff gross weight, lb	477,400
Payload, lb	103,000
Static sea level thrust, lb	48,320
Fuel burn, lb	130,300
Engine outfield length, ft	5436

Aircraft and Engine Noise Studies

Subsequent noise studies were also conducted by Boeing and MIT. The methodology and results are reported in Reference 16. The noise estimate for the N2A was shown to be -47 dB below Stage 3 (or -37 dB below Stage 4), within 5 dB of the N+2 goal. For the N2B, the noise was shown to be -26 dB below Stage 3 (or -16 dB below Stage 4). Based on the results, Boeing concluded that the N+2 noise goal is achievable with N2A configuration, with increased jet shielding, increased climb speed, additional focus on landing gear fairings, and with continuing R&D on HWB type aircraft. For the N2B, increasing the duct treatment (e.g., with acoustic tiles) and reducing the jet velocity will help it move towards the N+2 noise goal. A part of the continuing R&D is the need to further improve noise prediction methodologies, especially for an embedded engine.

Summary

NASA GRC conducted engine conceptual design studies on two engine concepts, podded and embedded systems, that were proposed for a HWB freighter aircraft for the 'N+2' timeframe. The results were provided to Boeing Phantom Works to support its investigation to develop a HWB subsonic freighter configuration with noise prediction methods to meet the NASA Subsonic Fixed Wing N+2 noise and fuel burn reduction goals. Based on its Phase 1 results, Boeing has concluded that the N+2 fuel burn and noise goals are achievable on a hybrid wing type vehicle, with continuing R&D on HWB type aircraft and improvement of noise prediction methodologies.

References

1. The Boeing Company, "Current Market Outlook 2008-2027," July 9, 2008. Retrieved on November 10, 2008 from: http://www.boeing.com/commercial/cmo/pdf/Boeing_Current_Market_Outlook_2008_to_2027.pdf
2. Airbus, "Global Market Forecast 2007-2026," 2007. Retrieved on November 10, 2008 from: http://www.airbus.com/fileadmin/documents/gmf/PDF_dl/00-all-gmf_2007.pdf
3. National Research Council, "Securing the Future of U.S. Air Transportation: A System in Peril," Washington, DC, National Academy Press, 2003.
4. National Research Council, "For Greener Skies," National Academy Press, 2002.
5. Cambridge-MIT Institute, "Silent Aircraft Conceptual Design," November 6, 2006.
6. Hall, C.A. and Crichton D., "Engine Design Studies for a Silent Aircraft," Journal of Turbomachinery, 129, July, 2007.
7. Liebeck, R.H., "Design of the Blended Wing Body Subsonic Transport," Journal of Aircraft, 41, No. 1, January-February, 2004.
8. NASA-Industry Cooperative Effort, "Numerical Propulsion System Simulation User Guide and Reference," Software Release NPSS 1.5.0, May 7, 2002.
9. Lytle, J.K., "The Numerical Propulsion Simulation: An Overview," NASA/TM-2000-209915.
10. Kirby, M.R., "Environmental Design Space, Tool Developments Enhancements," Semi-annual progress report, US Department of Transportation/Federal Aviation Administration, Project No. 1606A75, Contract No. 07-C-NE-GIT-1, May 2008.
11. Onat, E. and Klees, G.W., "A Method to Estimate Weight and Dimensions of Large and Small Gas Turbine Engines," NASA CR-159481, 1979.
12. Tong, M.T., Halliwell, I., Ghosn, L.J., "A Computer Code for Gas Turbine Engine Weight and Life Estimation," ASME Journal of Engineering for Gas Turbine and Power, volume 126, no. 2, April 2004.
13. Tong, M.T., Naylor, B.A., "An Object-Oriented Computer Code for Aircraft Engine Weight Estimation," GT2008-50062, ASME Turbo-Expo 2008, June 9-13, 2008.
14. Geiselhart, K., Berton, J.J., Tong, M.T., "Shape Memory Alloy Variable Area Fan Nozzle," NASA REVCON ISAT Report, April 2001.
15. American Gear Manufacturers Association Standard, 2003-A86, "Rating the Pitting Resistance and Bending Strength of Generated Straight Bevel, Zerol Bevel, and Spiral Bevel Gear Teeth," January 1992.
16. Kawai, R. and Brown, D., "Acoustic Prediction Methodology and Test Validation for an Efficient Low-Noise Hybrid Wing Body Subsonic Transport," Phase I Final Report PWD08-006A, NASA Contract Number NNL07AA54C, October, 2008.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
1. REPORT DATE (DD-MM-YYYY) 01-11-2009		2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Engine Conceptual Design Studies for a Hybrid Wing Body Aircraft			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Tong, Michael, T.; Jones, Scott, M.; Haller, William, J.; Handschuh, Robert, F.			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER WBS 561581.02.08.03.13.03		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-16910-1		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001 and U.S. Army Research Laboratory Adelphi, Maryland 20783-1145			10. SPONSORING/MONITOR'S ACRONYM(S) NASA, ARL		
			11. SPONSORING/MONITORING REPORT NUMBER NASA/TM-2009-215680; ARL-TR-4719; GT2009-59568		
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category: 01 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 443-757-5802					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Worldwide concerns of air quality and climate change have made environmental protection one of the most critical issues in aviation today. NASA's current Fundamental Aeronautics Research program is directed at three generations of aircraft in the near, mid and far term, with initial operating capability around 2015, 2020, and 2030, respectively. Each generation has associated goals for fuel burn, NOx, noise, and field-length reductions relative to today's aircrafts. The research for the 2020 generation is directed at enabling a hybrid wing body (HWB) aircraft to meet NASA's aggressive technology goals. This paper presents the conceptual cycle and mechanical designs of the two engine concepts, podded and embedded systems, which were proposed for a HWB cargo freighter. They are expected to offer significant benefits in noise reductions without compromising the fuel burn.					
15. SUBJECT TERMS Hybrid wing body; Fuel burn; Noise; Emissions					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES 14	19a. NAME OF RESPONSIBLE PERSON STI Help Desk (email:help@sti.nasa.gov)
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (include area code) 443-757-5802

